

Lider *plus*



**NOWADAYS, IT IS NECESSARY TO GIVE SOMETHING ELSE APART FROM
QUALITY AND TECHNOLOGY. AUTEX GIVES A PLUS: EXPERIENCE**




Lider Plus

Lider Plus is an automatic spreading machine with the best spread quality in the market. Supplied by a Roll Loader System from the Table to a built-in cradle, a single conveyor belt across the usable width of the machine. It can unroll any type of fabric quickly and naturally preventing marks on delicate fabrics caused by the partial tension from conventional multiple belt systems. Lider Plus complies with strict EU safety standards.

TECHNICAL CHARACTERISTICS

- Equipped with robotic technology.
- Automatic check control system.
- Speed variation from 0 to 100 metres/minute.
- High-speed cutting variation.
- Feed by highly sensitive infra-red sensor.
- Intelligent detector at end of stack with return to load point.
- Automatic spread height detector.
- Machine driven by four-wheels.
- Software program to connect the zigzag with cut.
- Program to count meters per roll, working time and total meters per spread.
- Intelligent control handle.
- Feeding system by cradle, a one piece double conveyor belt.
- One single conveyor belt **system prevents marking the fabric** and problems caused by loose threads falling between rollers on multiple conveyor belt system.
- Automatic threading and unthreading.
- Fabrics rewinding to remove faulting or colour variation.
- Device to spread the other side of the fabric roll.
- Tension Free System. Spread elastic fabrics without tension.
- Programmed feeding.
- Automatic feeding.
- **Digital touch screen** with parameter and information on functions.
- It can perform normal, programmed and scale spreads.
- Self-adjusting brakes ramp according to spread of machine.
- Adjustable acceleration.
- Safety brake in case of power failure.
- Fitted with **modem** for technical assistance on-line.
- Maximum roll weight recommended: **100kg**.
- Maximum diameter of the roll: **60cm**.
- Maximum height of the spreading: **22cm**.
- Maximum height for manual loading: **0.9mts**.
- Power consumes: **2.6kw**.

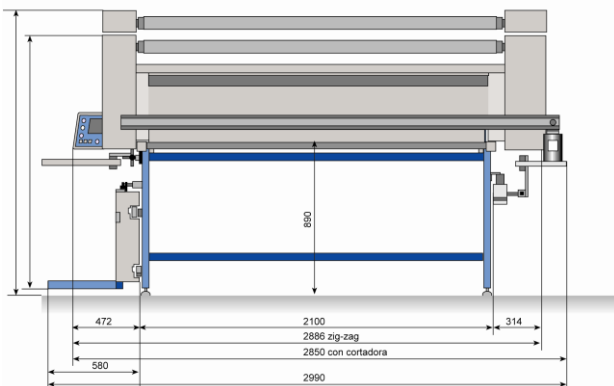

LIDER PLUS OPTIONS

- Autex.com Communication System.
- Spreading in **zigzag**.
- Spreading with adjustable **high speed cuts** with or without mobile clamp.
- High speed spreads in zigzag cut.
- Spreading in **tubular** fabric roll; or in book-folded.
- Double feeding for roll spreading.
- Book folder tray for open and tubular fabric.
- Roll support by traditional bar.
- Fast roll loader.
- **Smooth, air blowing, conveyor** and **vacuum** tables
- **3** different types of transfer table for machine: manual, manual on rails and motorised on rails.
- **2** different types of transfer table for spreads: manual and motorised.
- Rails and operator's platform.

Autex reserves the right to make any technical modifications



C/ Can Negoci, 18 - P.I. Can Negoci
08310 Argentona - Barcelona - Spain
Telephone: 0034 93 7589325
ventas@autex-int.com - www.autex-int.com